


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 3 TOWNSHIP 15 RANGE 4
DATE: 8-12-08
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 6-5-04

IN. S.P.C. E ZONE NAD '83
NAME: 15040304
N: 502606.1588(m)
E: 64321.2850(m)

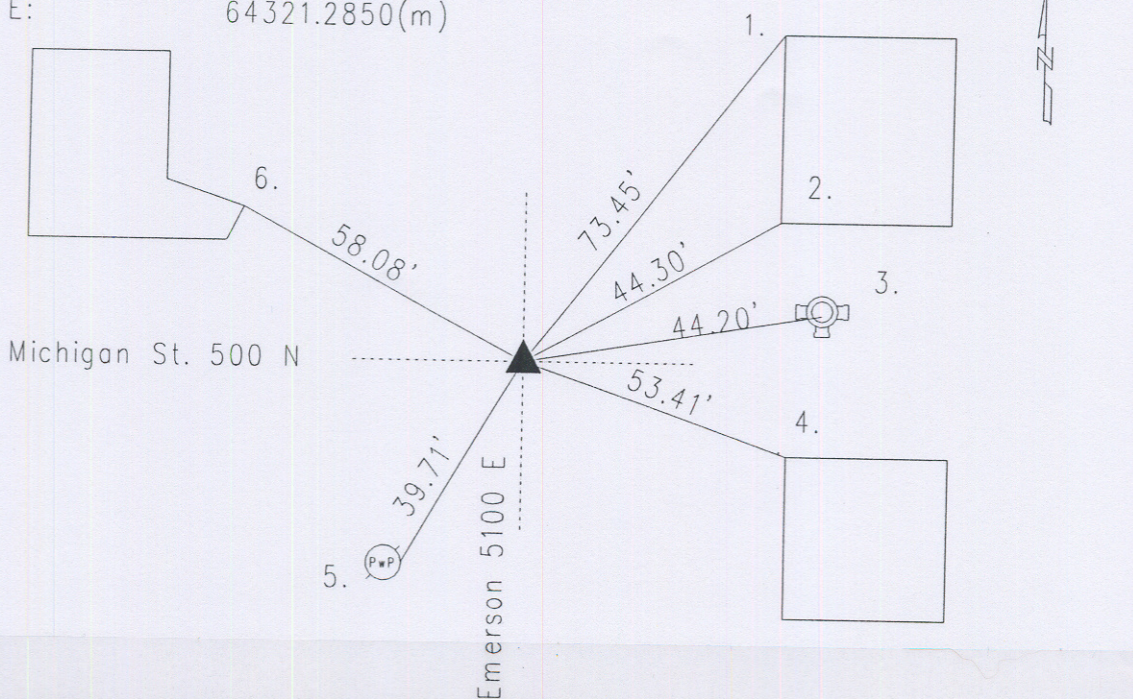

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 14" beech bearing north 67 degrees, thence east 25 links; and 15" dogwood bearing south 64 degrees, thence west 24 links. (M.C. Atlas p. 10) A survey by R. Mayhew in December of 1859 indicates no stone or witnesses. (Warren Legal Book p. 19) Corner referenced by Cleveland on 2/8/83 and called a pk nail set. Corner referenced by Wilcoxon on 2/26/92 and called a set pk nail. Corner referenced by Wilcoxon on 11/29/99 and called a pk nail. Corner referenced by Wilcoxon on 6/5/04 and called a pk nail. Corner excavated by Wilcoxon on 8/11/08 and a #205 cast iron Harrison Monument was set in position as the corner per ties and GPS.

15040304

| REF. | DISTANCE | DESCRIPTION |
|------|----------|--|
| 1. | 73.45' | NW corner of stucco face of building |
| 2. | 44.30' | SW corner of " |
| 3. | 44.20' | Top nut of fire hydrant |
| 4. | 53.41' | NW corner of brick building |
| 5. | 39.71' | Mag nail w/bw SF PwP#250-543A 8"up |
| 6. | 58.08' | Easterly corner of McShane's Bar: 5066 E. Michigan St. |
| | | |
| | | |
| | | |
| | | |